


EKLUND INFRARED Inc. CORONA CAMERA RENTAL SYSTEM 2019

Ofil DayCor® Superb™ OD

The Corona Detection Camera with the Highest UV Sensitivity!

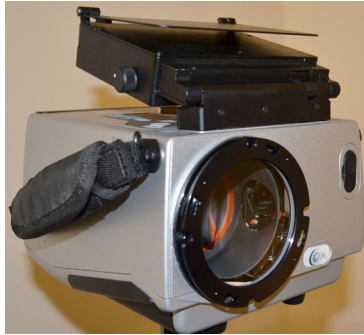

We have the DayCor® Superb™ available for rental or purchase!

- **The DayCor® Cameras accurately find pinpoints and visualizes** the exact location of Electrical Corona, Arcing, Micro Arcing and Partial Discharge events!
- Electrical Corona and arcing can lead to damaged insulators, corona rings, electrical & mechanical failures.
- **This can lead to dropped lines, possible forest fire hazard in dry season** and also audio noise and radio/TV interference.
- **Use our rental Corona Camera to assure that there are no dangerous issues.**
- It will help you to find and correct **Corona Discharges** as a protection against unplanned outages!
- Use this camera to properly check Overhead Lines and Substations on a regular basis for damaging Corona activity.

The DayCor® Superb™ is **very easy to operate!** It is a hand held portable **Bi-spectral 100% Solar Blind Corona Camera** that displays the UV electrical corona discharges overlaid onto a visible color video image in real-time. No time delay between the UV and the visible image presentation on the Trans Reflective LCD screen. **CERTIFIED Highest Sensitivity so you don't miss weak discharges!**

The DayCor® High efficiency Catadioptric Broadband lens system, with special UV glass optics together with the High Performance Lindner Solarblind UVc passband filter and the high sensitivity high resolution detection system, makes the DayCor® Superb™ the highest sensitivity Solarblind camera available. 5° x 3.75° optical FOV for the best image details on overhead lines and substations! 2&4X digital zoom.

The DayCor® is an excellent detection system for location of various other Ultraviolet UV sources in the 240-280 nm Spectral range!

It easily finds Corona on insulators and hardware for damage evaluation and is the ideal solution for cost effective and efficient predictive maintenance on overhead lines and substation components. **With its High Sensitivity, the DayCor® is also perfect for Detection of Generator and Motor Stator Corona and Partial Discharges!**

We have the EIR DayCor® Superb™ available for rental on a weekly (or longer) basis. Please contact us for pricing and availability. Our prices are very competitive. Please Call or email us.

Some of Our Ofil DayCor® Superb™ High Lights!

- **100% Solarblind for full daylight operation. Ofil Proprietary UVc Filter!**
- **Exceptionally High sensitivity even at distance. Better than 1.5×10^{-18} watt/cm²**
- **Fast One-touch Key functions operation; *no need for menu browsing!***
- **Built-in High Speed auto-focus system!**
- **CERTIFIED the most sensitive Bi-Spectral Solarblind Corona Camera available**
- **Integrated high-brightness, Trans Reflective adjustable color 5" LCD viewer** designed with safety in mind and made large enough for all team members to view. (No eye type viewfinder needed)
- **The Superb's unique design enables long continuous inspections and eliminates arm and eye strain.**
- **One touch digital on-board color video recording onto SD card with included voice annotation.**
- Playback on-board function for images and videos.
- Snapshot still picture recording using touch key
- **Made for inspection under any light and weather conditions**
- Integration mode for increased gain and reduced background noise
- **Exceptionally High sensitivity even at distance. Better than 1.5×10^{-18} watt/cm² at full frame rate!**
- Detection and display of Corona Emission as weak as 1pC at 10meter distance.
- Blob counting and numerical display for evaluation of the corona strength
- **More than 3 hours continuous operation per Li-ion rechargeable battery.**



If you **suspect or hear audible corona discharges**, rent or buy our **Superb™ OD 100% Solar Blind Camera** to pinpoint the exact location of the Corona Discharges and to evaluate the seriousness of the problem. A contaminated insulator can be a cause for a damaging flashover!

As an OFIL Representative since 2002, we have the whole line of DayCor® Cameras available for purchase. Please contact us for rental prices and availability at: EKLUND INFRARED/Eklund Innovation Inc., 2985 Gordy Parkway, Marietta, GA 30066. Voice 770-578-4435. Fax 770-578-9899
info@eklundir.com www.coronacamerarental.com or www.eklundir.com

EKLUND INFRARED Inc. CORONA CAMERA RENTAL SYSTEM 2019 Ofil DayCor® Superb™ OD Camera Technical Specifications	
UV – Optical Properties (With Ofil Proprietary Solar-Blind UVc Filter)	
Highest UV Sensitivity; better than:	1.5x10 ⁻¹⁸ watt/cm ²
Minimum Discharge Detection	1 pC (Pico Coulomb) @ 10 meters (RWE certified: IEC 60270:2000) Tested & Certified
Minimum RIV Detection	7.7dBµV (RIV)@1MHz (RWE certified: NEMA107-1987)
Field of View (H x V)	5° x 3.75°
Detector Lifespan	No degradation
Focus	Full continuous rapid Auto-Focus for UV and visible channels. Manual focus adjustment
Focus Distance	3m/9ft to infinity. (0.5m with optional close-up lens)
Digital UV/Combined Zoom	2X and 4X
Spectral Range	240-280 nm.
Visible – Optical Properties	
UV/Visible Overlay Accuracy	Better than 1 milliradian
Minimum Visible Light Sensitivity	0.1 Lux
Video Standard	Full Color NTSC
Rapid Visible Zoom	18 optical x 12 digital attained within 1 sec
Display	
Type	Integral Color Transflective Sunlight Readable LCD, adjustable
Brightness	450 cd/m ² reflective, adjustable
Resolution	640x480 pixels, color
Size	5 inch
Modes	Combined (UV & Visible), UV only, Visible only
External Video Output	NTSC via BNC jack
Controls & Operation	
Method	Keyboard
Functions Activation	Touch key, one touch button
Rapid Zoom (See above)	Continuous push button max attained within 1 second
System Status Indicator	LCD display shows low battery warning
Mounting Point	Standard 1/4" X20 thread tripod mount
Environmental	
Storage and operations temp	-20°C to +55°C , -4°F to +131°F
Encapsulation	IP54, Certified
Media Capture & Storage	
Video & Stills Capture	Internal
Video Format	AVI
Stills Format	BMP
Audio	External microphone
Playback	Video and still pictures
Digital Storage	Memory flash card
Physical Characteristics & Power Source	
Weight	7.3 lbs. (3.3 kg)
Dimensions	L9.1" x W7.1" x H5.9" (23x18x15 cm)
Nominal Power Source and Consumption	12V DC, 16 Watts
Power Source	Rechargeable Li-ion batteries for up to 3.5 hour's continuous operation each. Universal AC/DC 12V Adapter